

Straight Side Four Plunger High Speed Press HD-350W

KEY FEATURES

Alloy casting frame

3 sets of massive frame resist deflection and reduce vibration.

10 points crank supporting

2 bearings & 8 hydro-dynamic brass bushings are applied to get smaller clearance.

Slide quick lift

The height of slide quick lift is 70mm. After trouble shooting, slide return to original height and B.D.C. kept still.

Dynamic balancer

Dynamic balancer reserves weight of upper die to eliminate the inertia produced by reciprocation.

Slide guiding system

8 square guide gibs and linear bearings are applied to absorb the sideward thrust during stamping.

Hydraulic locking device

Hydraulic locking device of screw rod eliminates the clearance to keep reciprocating accuracy.




ING YU PRECISION INDUSTRIES CO., LTD.

43-11 Sha-Tien Rd. Sha-Lu Dist., Taichung
City 43354 TAIWAN

TEL: 886-4-26358569 FAX: 886-4-26353068

info@ingyu.com www.ingyu.com

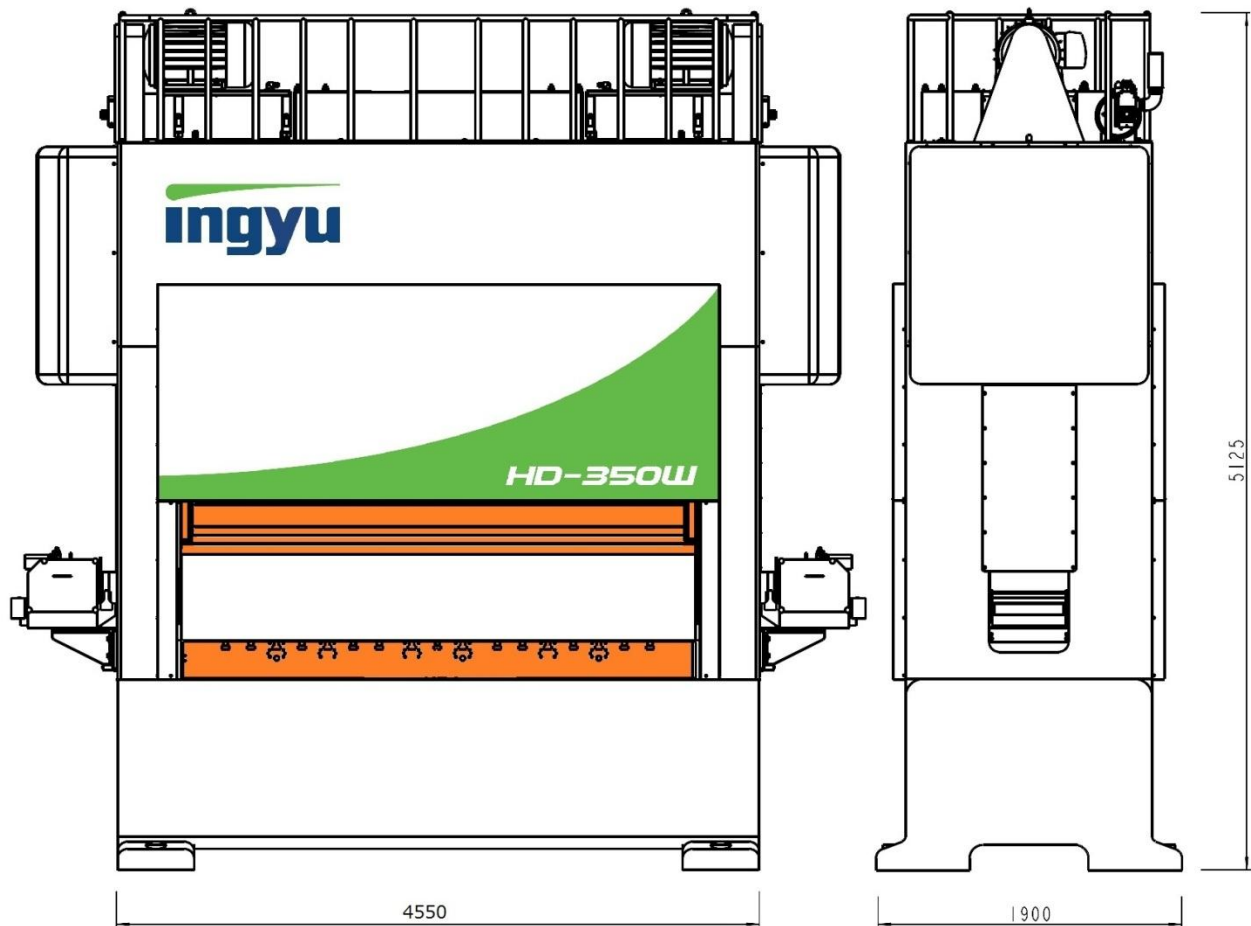

Model	HD-350W	♦ Alloy casting frame
Capacity (ton)	350	♦ Dynamic balancer
Stroke (mm)	30	♦ 10 points crank supporting
Speed (spm)	150 - 350	♦ Dual flywheel
Die height (mm)	540 - 600	♦ Separated clutch & brake
Bolster area (mm)	3700 x 1200	♦ Slide guiding system
Slide area (mm)	3700 x 800	♦ Hydraulic locking device
Max. upper die weight (kg)	3500	♦ Slide quick lift system
Main motor (hp)	80	♦ Circulating lubrication & cooler system